


SECTION A-A
Scale: None

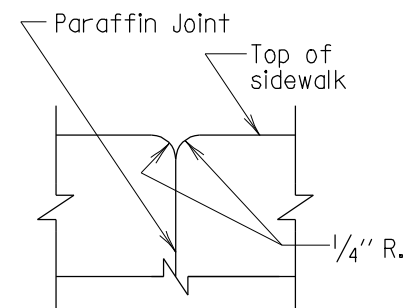

SECTION C-C
Scale: Full

Notes:

1. Place vertical paraffin joint, shown hatched, at centerline of pier on multi-span continuous bridges.
2. The placement of adjacent sections shall have a 40 hour delay between placements.
3. Railing and fencing not shown.

*In order to insure a smooth and acceptable surface, 420.03.11 (Construction Joints) will be strictly adhered to.

APPROVAL	
<i>E. S. Friedman</i>	DIRECTOR
OFFICE OF STRUCTURES	
DATE: 12/1/93	
REVISIONS	
SHA	FHWA
9-24-96	
12-17-01	
6-1-05	
FHWA APPROVAL	
DATE: 10-13-06	

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF STRUCTURES

PARAPET CONTROL JOINT AND DUAL CONDUIT
PLACEMENT WITH 34" F-SHAPE PARAPET AND
PARAPET WITH SIDEWALK

STANDARD NO. BR-SS(6.37)-05-247A

SHEET 4 OF 4